

Effect of Preparation Conditions on the Characteristics of Activated Carbon Produced in Laboratory

¹J.O Otulana, ²O.O Oluwole

¹Mechanical engineering department Moshood Abiola Polytechnic

²Mechanical engineering department university of Ibadan

Abstract: The goal of this research is to investigate the effects of dehydrating agents and preparation conditions on the physical characteristics of activated carbon produced from coconut shell as precursor material. The chemical activation process was accomplished by impregnating the raw materials with different dehydrating agents (KOH, ZnCl₂), prior to heat treatment. Characterization of activated carbon was done using scanning electron microscope. Activation temperature of 450 °C and holding time of 3 hours, proved to be the optimum conditions for preparing activated carbon. Coconut shell treated with KOH displayed activated carbon of larger pore size (1.8nm) than those treated with ZnCl₂ (0.14nm).

Keywords: Activated carbon; Holding time, Chemical activation; Activation temperature, Pore size.

1. INTRODUCTION

Activated carbon is a microcrystalline form of carbon with very high porosity and surface area. It is a form of carbon that has been processed to make it extremely porous and thus to have a very large surface area available for adsorption or chemical reactions. (Odesola and Daramola, 2009). Activated Carbon is distinguished from elemental carbon by the removal of all non-carbon impurities and the oxidation of the carbon surface. (Benaddi, 2000). Activated Carbon contain physical characteristic such as internal surface area and pore volume. The large surface area results in a high capacity for absorbing chemicals from gases or liquids. The adsorptive property stems from the extensive internal pore structure that develops during the activation process. Activated carbons with highly developed surface area are widely used in a variety of industries for applications which include separation/purification of liquids and gases, removal of toxic substances, as catalysts and catalyst support (Moon and Shim, 2006; Fuente et al., 2001). With the development of technology, the applications of activated carbons keep expanding, with newer applications such as super-capacitors, electrodes, gas storage, and so on (Yuan and Zhang, 2006; Oda and Nakagawa, 2003; Biloé et al., 2002). Activated carbons can be prepared from a variety of precursors with a high carbon content and low levels of inorganic compounds. Various carbonaceous materials such as coal, lignite, nutshells, wood, and peat are used in the production of commercial activated carbon. However, abundance and availability of agricultural by-products make them good sources of raw materials for activated carbons. The raw material for a activated carbon plays a major part in determining the ability of the final product to adsorb certain molecular species. Activated carbons produced from coconut shells exhibit a predominance of micropores, while coal based carbons have a wider range of transitional pores. Guo and Lua (2003) mentioned that the characteristics of activated carbon depend on the physical and chemical properties of the raw materials as well as activation method used. Physical properties of AC, such as ash content and moisture content can affect the use of a granular AC and render them either suitable or unsuitable for specific applications.

2. PRODUCTION OF ACTIVATED CARBON

Two basic methods are available for the production of activated carbon; physical and chemical activation. The challenge is to produce activated carbon with the desired pore size distribution and surface chemistry from low cost carbons (Benaddi et al 2000). Physical activation includes carbonization of the precursor in an inert atmosphere and activation the resulting char by an activation agent such as CO₂, steam or air. The carbonization (pyrolysis) process is usually conducted in the absence of air. During the carbonization step, most of the non-carbon elements, mainly volatiles are removed, leaving a char with high carbon content and slight porosity. Chemical activation is a single-step process including the impregnation of the carbonaceous material with dehydrating agent prior to activation. The significance of the impregnation is to enhance the pore structure of precursor and hence increases its surface area. The chemical agents used in the chemical process are normally alkali and alkaline earth metal containing substances and some acids such as KOH, K₂CO₃, NaOH, Na₂CO₃, ZnCl₂, MgCl₂ and H₃PO₄. Although, phosphoric acid is shown to be the most environmentally sound chemical for the activation processes, most studies have used zinc chloride due to its effective activating capability (Park, and Jung 2003). Chemical activation of carbonaceous materials has been the subject of considerable interest in the past because activated carbon, with a well-developed porosity, can be produced by this process in a single operation. Also, it has been found that the effect of some chemicals on the carbon precursor yields more char and less tar than the untreated sample (Ahmadpour and Do, 1996). If chemical activation is essentially considered as a reaction between the solid precursor and the chemical, it is clear that concentration, temperature and activation time determine the extent of the reaction. However, such reaction cannot proceed to completion because it would mean the destruction of the precursor (Molina-Sabio, and Rodríguez-Reinoso, 2004). The extent of the chemical activation can significantly alter the characteristics of the carbons produced.

3. EXPERIMENTAL

The present work focuses on the evaluation of the potential use of an inexpensive material which is available at large quantities (coconut shell) as precursor material for the production of highly effective activated carbons using chemical activation processes. Different types of activated carbons produced were investigated. Two dehydrating agents were used to treat the coconut shells prior to pyrolysis to further improve the porous properties of the activated carbon. The chemical activators (KOH, ZnCl₂) were used to assess the effect of dehydrating agents on the characteristics of the activated carbons.

3.1 Procedure:

200 grams of the grinded coconut shell sample were dried in an electric oven at 110 °C for 48 hours in order to remove all moisture present in the sample. This was impregnated with two dehydrating agents KOH and ZnCl₂. A typical carbonization run began by charging 20 grams of impregnated sample in the reactor and heating it up to the carbonization temperature in flowing stream of nitrogen (Wan Daud and Wan Ali 2004) The temperature of the reactor was increased at the rate of 10 °C/min until it reached the final carbonization temperature. Since most literatures reported that optimum activation temperature for most biomass materials generally fall between 400 °C and 500 °C, (Srinivassakannan and Zailani Abubakar 2004), 450 °C was chosen as the final carbonization temperature. The carbonized samples were subjected to this temperature for 1 hour and 3 hours. The samples were cooled down under nitrogen flow and were washed sequentially with warm water and finally with cold water to remove residual chemicals. The samples were dried at 110 °C in an electric oven.

3.2 Characterisation:

3.2.1 Scanning electron microscopy (SEM):

Texture and surface properties of the adsorbents play an essential role in determining their performance. The final application of carbon materials will depend on their characteristics. Electron microscopy is widely used technique to probe the surface topography of activated carbon. Scanning Electron Microscope, was used to characterise surface properties of the activated carbons.

4. RESULTS AND DISCUSSIONS

In this study, a coconut shell was used as precursor materials in an attempt to produce activated carbons with high surface area, well-developed porous structure and match the requirements of industry. Chemical activation process was adopted.

The effects chemical activators and various activating conditions on the structure and texture properties of the resulting activated carbons were investigated.

4.1 Activated carbons characteristics:

Electron microscopy is commonly used for the characterization of the topography of activated carbons. It provides useful information relating to the porous nature of carbon's exterior and adsorbent porosity. Scanning electron microscopy was conducted to study the surface topography of activated carbons. SEM image of coconut shell based chemically treated activated carbon (ACS) which clearly shows its porous structure and complete opening of cell pores on the surface. As can be seen from the micrograph, there is a formation of pores which may be due to release of some volatiles and activating agent from the sample. The external surface of ACS was full of cavities which are due to the removal of dehydrating agents thereby leaving the space which was previously occupied by the activating agent. In this way it provides a larger surface area. The examination of the activated carbon impregnated with KOH (Fig.1) shows the presence of a few micropores of size (1.8nm) as against that impregnated with ZnCl₂ 0.14nm (fig 2). In both samples a regular microporous and homogeneous surface are obtained by activation at for 3 hours at 450 °C.

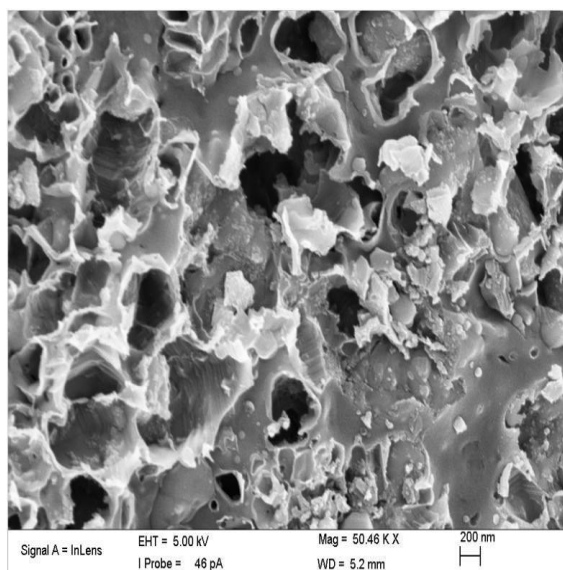


Fig 1: KOH AC

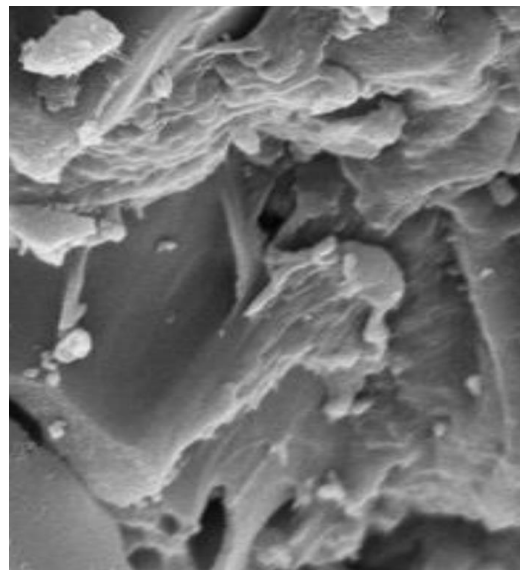


Fig 2: ZnCl₂ AC

5. CONCLUSION

The focus of this research was to investigate the effects of dehydrating agents and preparation conditions on the physical characteristics of the activated carbon produced from coconut shell as a precursor material. Chemical activation process was employed for the production processes. Electron microscopy was used for the characterization of the topography of activated carbons. On the basis of present studies, many conclusions can be drawn:

- The physical and chemical characteristics of the activated carbon was significantly impacted by both activating temperature and holding time.
- Activating temperature of 450 °C and holding time for 3 hours proved to be the optimum charring conditions for producing activated carbon as indicated by the superior physical characteristics.
- Regardless of the dehydrating agents used, approximately, all samples produced from coconut shell are essentially microporous.
- The surface topography using scanning electron microscope indicates microporosity of the activated carbons produced.

REFERENCES

- [1] Ahmadpour, A. D. (1997). The preparation of activated carbon from Macademia nutshells by chemical activation. *Carbon*, 35, 1723-1732.
- [2] Ahmedna, M. M. (2000.). Production of granular activated carbons from select agricultural by-products and evaluation of their physical, chemical and adsorption properties. . *Bioresource Technology* 71 , 113–123.
- [3] Atanda, P. O. (July-2014). Modeling heat flow across the fuel-fired crucible furnace using ADINA . *International Journal of Scientific & Engineering Research*, Volume 5, Issue 7, 608-614.
- [4] Benaddi.H, B. J. (2000). Surface functionality and porosity of activated carbons obtained from chemical activation of wood . 669-674.
- [5] Bhatia. (2012). Overview of Refractory Materials. Fairfax, Va, USA: PDH Online.
- [6] Bouchelta Chafia, S. M.-P. (2008). Preparation and characterization of activated carbon from date stones by physical activation with steam. *Journal of Analytical and Applied Pyrolysis* 82, 70–77.
- [7] Cigdem, S. .. (2006.). Preparation and characterization of activated carbons by one-step steam pyrolysis/activation from apricot stones. *Microporous Mesoporous Mater.* 88, , 126–134.
- [8] Daud, W. A. (2000.). The effects of carbonization temperature on pore development in palm-shell-based activated carbon. . *Carbon* 38 , 1925–1932.
- [9] Donni Adinata, W. M. (2007). Preparation and characterization of activated carbon from palm shell by chemical activation with K₂CO₃. *Bioresource Technology* 98, 145–149.
- [10] Foo K.Y, H. B. (2012). Coconut husk derived activated carbon via microwave induced activation: Effects of activation agents, preparation parameters and adsorption performance. *Chemical Engineering Journal* 184, 57– 65.
- [11] Gomez-Serrano, J. P.-V.-F.-V.-C. (1996). FT-IR study of rockrose and of char and activated carbon. *Journal of Analytical and Applied Pyrolysis* 36, 71-80.
- [12] Gomez-Serrano, V. C.-C.-G.-F.-G. (2005). Preparation of activated carbons from chestnut wood by phosphoric acid chemical activation. Study of microporosity and fractal dimension. . *Mater.Lett.*59, 846-853.
- [13] Guo, J. L. (2002.). Textural and chemical characterization of adsorbent prepared from palm shell by potassium hydroxide impregnation at different stages. *J. Colloid Interface Sci.* 254, 227–233.
- [14] Guo, J. L. (2003.). Textural and chemical properties of adsorbent prepared from palm shell by phosphoric acid activation. *Mater. Chem. Phys.* 80, 114–119.
- [15] Guo, J. L. (2000.). Characterization of adsorbent prepared from oil palm shell by CO₂ activation for removal of gaseous pollutants. . . *Mater. Lett.* 55, 334–339.
- [16] Guo, J. (2003). Textural and Chemical Properties of Adsorbent Prepared from Palm Shell by Phosphoric acid activation. *Mater.Chem Phys.*, 114-119.
- [17] Guo, Jia, L. A. (2000.). Preparation of activated carbons from oil-palm-stone chars by microwave-induced carbon dioxide activation. *Carbon* 38, 1985–1993.
- [18] Gurrath, M. K. (2000). Palladium catalysts on activated carbon supports: influence of reduction temperature, origin of the support and pretreatments of the carbon surface. . . *Carbon* 38 , 1241-1245.
- [19] Henning, K. S. (1993.). Impregnated activated carbon for environmental protection. . *Gas Sep. Purif.* 74, , 235–240.
- [20] J. M. Ketcha, D. J. (2012). Preparation and Characterization of Activated Carbons Obtained from Maize Cobs by Zinc Chloride Activation ., *American Chemical Science Journal* 2(4): , 136-160.

International Journal of Novel Research in Engineering and Science

 Vol. 5, Issue 2, pp: (1-6), Month: September 2018 - February 2019, Available at: www.noveltyjournals.com

- [21] JABIT, N. B. (JUNE 2007). The Production And Characterization Of Activated Carbon Using Local Agricultural Waste Through Chemical Activation Process. Unpublished Thesis submitted in fulfillment of the requirements for the degree of Master of Science.
- [22] Li, W. Y. (2008). Effects of carbonization temperatures on characteristics of porosity in coconut shell chars and activated carbons derives from carbonized coconut shell chars. . *Industrial crops and products* 28, 190-198.
- [23] Li, W. Z. (2008.). Preparation of high surface area activated carbons from tobacco stems with K_2CO_3 activation using microwave radiation. *Ind. Crops Prod.* 27, 341–347.
- [24] Lua AC, G. J. (2000). Activated carbon prepared from oil palm stone by one-step CO_2 activation for gaseous pollutant removal. . *Carbon* 38:,1089-97.
- [25] Lua AC, G. J. (1998). Preparation and characterization of chars from oil palm waste. *Carbon* 36, 1663-1670.
- [26] Lua, A. L. (2006). Influence of pyrolysis conditions on pore development of oil-palm-shell activated carbons. *Journal of Analytical and Applied Pyrolysis* 76, 96-102.
- [27] Lua. A.C., Y. T. (2004.). Effect of activation temperature on the textural and chemical properties of potassium hydroxide activated carbon prepared from pistachio-nut shell. . *Journal of Colloid Interface Sci.* 274 , 594– 601.
- [28] Marsh .H Heintz. F, R.-R. (1997). Introduction to carbon Technologies. Alicante: Secretariado de Publicacions (Baharun).
- [29] Mazyck, D. C. (2000.). Overcoming calcium catalysis during the thermal reactivation of granular activated carbon. Part I: Steam-curing plus ramped-temperature N_2 treatment. *Carbon* 38, 1785–1799.
- [30] Moon, S.-H.-W. (2006). A novel process for CO_2/CH_4 gas Separation on activated fibres-electric swing adsorption. *Journal of Colloid and Interface Science* 296, 523-528.
- [31] Odesola, I. a. (2009). “Developing a Local Capability for the Manufacture of Active Carbon from Agricultural Waste”. *Pacific Journal of Science and Technology.* 10(2) , 275-288.
- [32] Purushothaman, R. (June2008). Evaluation and Improvement of Heat Treat Furnace Mode. Worcester: A Dissertation Submitted to the Faculty of the Polytechnic Institute in partial fulfillment of the requirements for the Degree of Doctor of Philosophy in.
- [33] Purushothaman, R. (June 2008). Evaluation and Improvement of Heat Treat Furnace Model. A Dissertation Submitted to the Faculty of the Worcester Polytechnic Institute in partial fulfillment of the requirements for the Degree of Doctor of Philosophy in Manufacturing Engineering.
- [34] SEGUN, S. J. (2008). Design, Fabrication and Testing Of 10kg Resistance Furnace for Melting Of Aluminium with Temperature Regulation. FUT MIInna: unpublished B.Sc thesis.
- [35] Smisek.M, C. (1970). Active Carbon: Manufacture ,Properties and Application. Amsterdam/New York: Elsevier.
- [36] Srinivasakannan C, A. (2004). Production of activated carbon from rubber wood sawdust. *Biomass and Bioenergy* 27, 89-96.
- [37] Su, W. Z. (2003). . Preparation of microporous activated carbon from coconut shells without activating agents. . *Carbon* 41, , 861–863.
- [38] V. Gomez-Serrano, J. P.-V.-F.-V. (n.d.).
- [39] Walker, G. W. (2000.). Textile wastewater treatment using granular activated carbon adsorption in fixed beds. *Sep. , Sci. Technol.* 35 , 1329–1341.
- [40] Wan Daud, W. W. (2004). Comparison on pore development of activated carbon produced from palm shell and coconut shell. *Bioresour. Technol.* 93 , 63–69.

International Journal of Novel Research in Engineering and Science

Vol. 5, Issue 2, pp: (1-6), Month: September 2018 - February 2019, Available at: www.noveltyjournals.com

- [41] Wan Nik, W. M. (24-25th July 2006.). "Production of Activated Carbon from Palm Oil Shell Waste and Its Adsorption Characteristics". Proceedings of the 1st International Conference on Natural Resources Engineering Engineering & Technology (pp. 646-654). Putrajaya, Malaysia.
- [42] Wei, J. L. (2011). Use of inexpensive semicoke and activated carbon as cathode in microbial fuel cells. *Bioresource Technology* 102, 10431-10435.
- [43] Wen, Q. L. (2011). Study on Activated carbon derived from sewage sludge for adsorption of gaseous formaldehyde. , *Bioresource Technology* 102, 942-947.
- [44] Weng, C. H. (Sep.2008.). Regeneration of granular activated carbon by an electrochemical process. . *Purif. Technol.* 64, 227-236.
- [45] Yang.K.B, P. J. (2010). Textural characteristics of activated carbon by single step co2 activation from coconut shells. *Journal of Taiwan Institute of Chemical Engineers* 41, 367-372.